

NOTE: This instruction sheet is for informational purposes only. Your working environment may differ from what is shown in the pictures. Please determine the location of wiring and plumbing before you begin. It is your responsibility to ensure proper installation and, if in doubt, contact customer service. While our products are designed for homeowner installation, you assume all risk associated with the installation process. You may view Installation Videos at <https://closetvids.com>

Hamper Installation



STOP!



Watch the video at:
www.closetvids.com

FASTENERS

These are the fasteners used in the assembly of Perfect Spaces Storage Systems:



Drawer Face Screw



Wood Screws
(1 1/4", 2", 3")



Rafix Connector Stud



Sharpie
(1/2" & 3/4")



Shelf Pin



Pan Head Screw
(5/8")



EZ Anchor



L-Bracket



Mending Plate



Euro Screws
(Short / Long)



Breakaway Screws (Gold / Silver)


When purchasing your first closet you will receive a supply of fasteners adequate to complete the installation of your storage system. On your next closet order you will need to include a parachute bag stocked with a supply of fasteners. Please see the "Parachute Bags & Fasteners" guide/video for details.



Need more installation information?


Scan this QR code for detailed procedures and helpful technical tips in our full installation manual.

Identify the two types of brackets that come packaged with your hamper stay hardware. These smaller ones are what will be mounted on the door panel, one on each side.

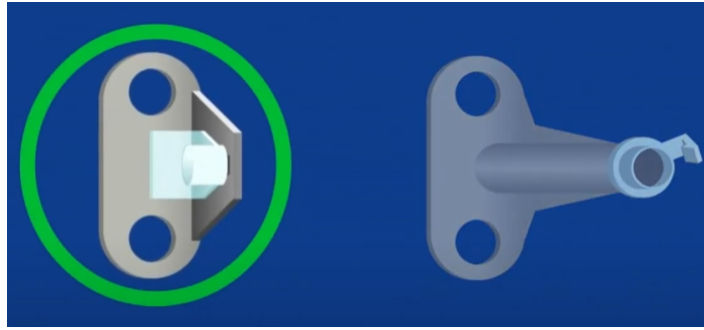


To measure and mark the placement of your hamper brackets on your door, identify the bottom edge of your door panel (the end with holes drilled for the hinges).

You will need to mark two screw holes $\frac{15}{16}$ " from the side edge of the door panel. The first screw will be $8\frac{3}{4}$ " from the bottom and the second will be at 10" from the bottom.


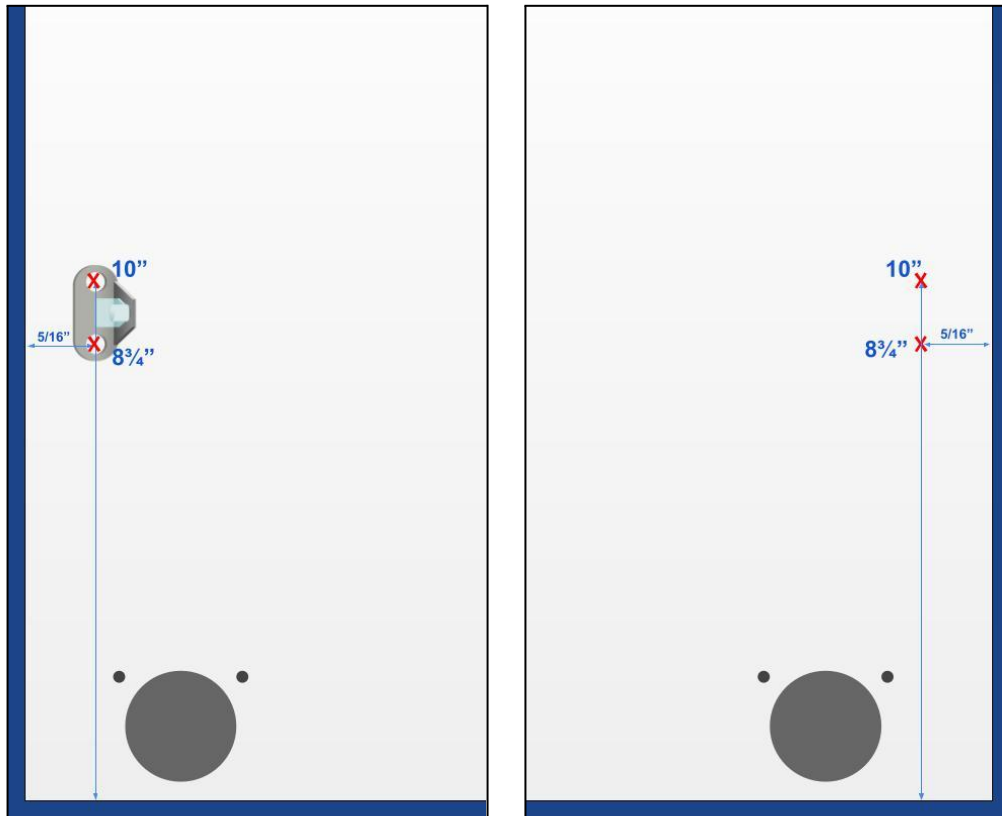


Fasten the brackets using $\frac{5}{8}$ " inch pan head screws, then repeat the same measurements on the other side and install the second bracket in the same manner.

Install the other (larger) brackets on the vertical panel using euro screws in the **9th** and **10th** system holes up from the bottom shelf.

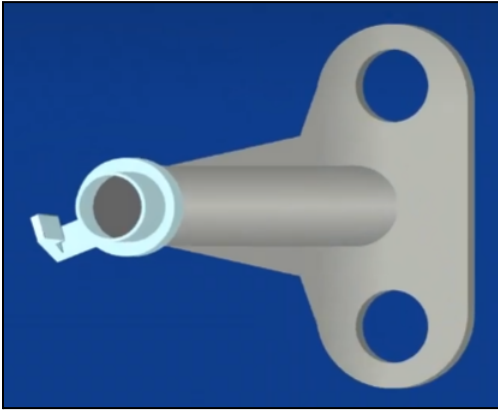

Connect the components of the hamper-stay hinge to each other as shown.

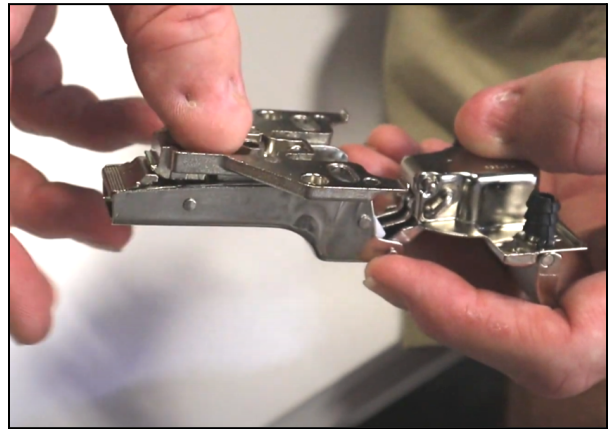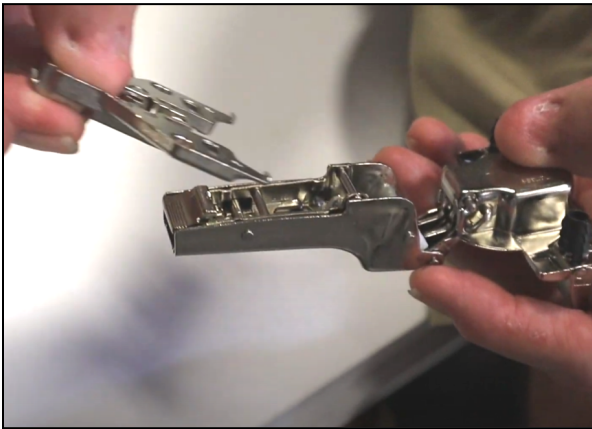

Press the hamper stay hinge hardware into the pre-drilled holes in the door panel, then push down on the flaps until they lock firmly in place.




Place a box or some other support on the floor to support the door while working on it.



Center the door with the hinge pushed against the front lip of the bottom shelf and install a 5/8" pan head screw in each of the hinges.



Close the door and check the door alignment. Confirm that the reveals are even on both sides of the door. If they are not, loosen the hinge screws and adjust the door, then tighten them again once aligned.

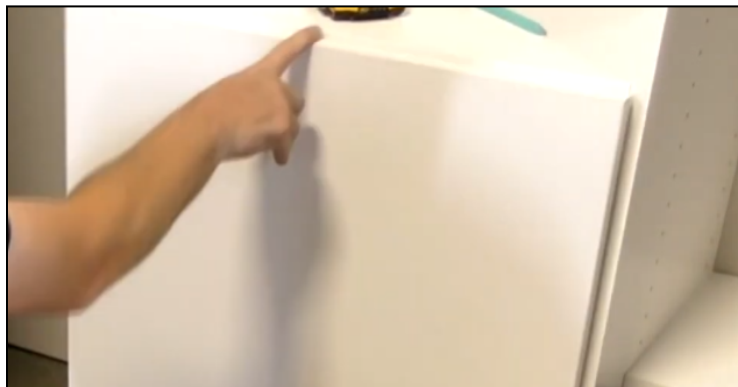

Install a second screw in each hinge, then lift up on the front of the hinge to release it. Remove the door and install a screw in the center hole of each hinge.



Important: Install an L-bracket on each side near the front. Hamper stay may cause the shelf to pull upwards if L-brackets are not installed.



Snap the hinges back in place, then prepare the tension arms for installation. Notice the two arrows that are etched into them. When you take the arms out of the package the two arrows will be pointed towards each other. Before installation, **rotate the arms so that the arrows are pointing away from each other.**



Snap the arms onto the brackets of the vertical panel as shown, then close the door partly and snap the arms onto the brackets on the door panel.



Center the hamper basket inside the door and confirm that it is high enough to avoid hitting the bottom shelf and low enough to not interfere with where your door handle will be mounted. Fasten it in place with pan head screws.

